

CUSTOMER _____

CUSTOMER'S P/N _____

DESCRIPTION _____ POWER INDUCTOR _____

SGTE PART NO. _____ GPDA0808-4R7M02 _____

SAMPLE NO. S12021602 REVISION NO. A DATE 16-Feb-12

SPECIFICATION FOR APPROVAL

FULLY APPROVED	REVISE APPROVED

SGTE 感通科技

深圳感通科技有限公司 (大陸工廠)

GANTONG TECHNOLOGY (SHENZHEN) CO., LTD.

深圳市平湖街道平湖村萬福路 26 號

No.26 Wan fu Road, Ping hu Village. Ping hu town, Shenzhen City.

Tel: 0755-28457600

Fax: 0755-28452952

感通科技有限公司 (台灣辦事處)

臺北縣汐止市新台 5 路一段 77 號 10 樓之 7

10F~7, NO.77, Sec.1, Hsin Tai 5 Road, Shi-chi City, Taipei.

Tel: 886-2-8698-2341

Fax: 886-2-8698-2342

納美科技股份有限公司 (香港辦事處)

LAPEE TECHNOLOGY LIMITED

香港九龍尖沙嘴加連威老道嘉蘭圍 5-11 號利時商業大廈 17 樓 1713 室

Room 1713 17/F, Rise Commercial Bldg 5-11 Granville Cri cuit, Granville Rd, TSim Sha Tsui., Kln

Tel: 852-25301111

Fax: 852-25371111

<http://www.sgte.cn>

SPECIFICATION

RoHS
COMPLIANT

INDEX

COVER PAGE

- SHAPE & DIMENSION.....1-8
- ELECTRICAL CHARACTERISTICS AND EXTERNAL
TEST REPORT.....2-8
- ELECTRICAL CHARACTERISTICS.....3-8
- ELECTRICAL CHARACTERISTICS.....4-8
- ELECTRICAL CHARACTERISTICS.....5-8
- PACKING FOR SPECIFICATION.....6-8
- GENERAL CHARACTERISTICS.....7-8
- THE CONDITION OF REFLOW.....8-8

APPROVED BY

CHECKED BY

DRAWING BY

Jesse

2/16

Tony

2/16

Hu


2/16

SPECIFICATION

**RoHS
COMPLIANT**

Customers Part Number	Item Name	Date
	Power Inductor	16-Feb-12
Gan Tong Part NO.	Sample NO.	Page
GPDA0808-4R7M02	S12021602	1-8


External Dimensions Unit (mm)

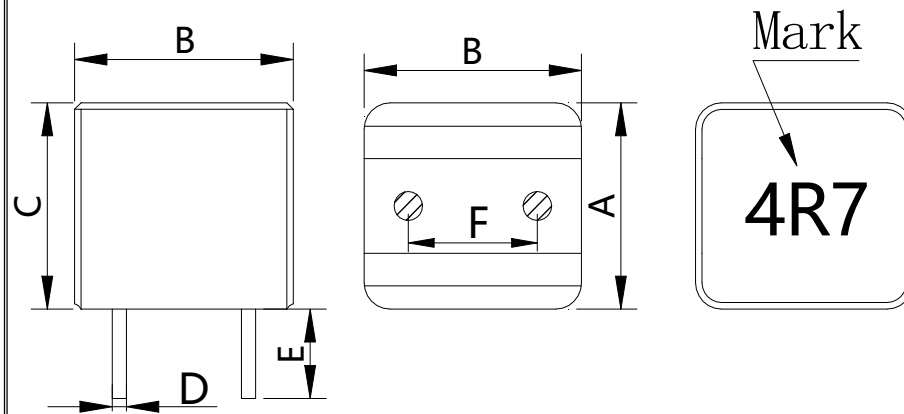


A	8.2± 0.5 (mm)
B	8.2± 0.5 (mm)
C	8.0Max (mm)
D	0.55± 0.1 (mm)
E	3.4± 0.5 (mm)
F	5.0± 0.5(mm)
G	5.0± 0.5(mm)
H	0.75 (ref)

Coating:Black

Connection



Recommended Land Pattern

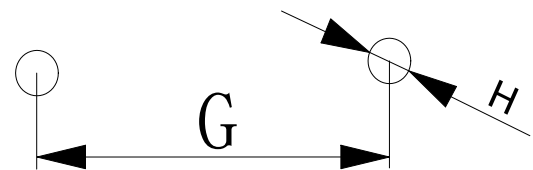

Electrical Specification

Measurement Item	Unit Tolerance	Specification	Test Frequency	Test Instrument
L	uH (±20%)	4.7uH ±20%	100KHz/1V	LCR Meter Agilent/4284A or Chroma/11300
DCR	mΩ	17.5mΩ (Max)		Chroma/16502
I rms	Amps	6A	100KHz/1V	LCR Meter Agilent/4284A+42841A or Chroma/11300+3302+1320+1320S
I sat	Amps	14A	100KHz/1V	

- I rms: Current that causes a 40°C temperature rise from 25°C ambient.
- I sat: DC current at which the inductance drops 35% from it's value without current.
- All test Data is referenced to 25°C ambient.
- Operating Temperature Range: -25°C to +125°C

TEST REPORT

**RoHS
COMPLIANT**

Customers Part Number	Item Name	Date	
	Power Inductor	16-Feb-12	
Gan Tong Part NO.	Sample NO.	Revision No.	Page
GPDA0808-4R7M02	S12021602	A	2-8

Electrical Characteristic

Item	L0A	DCR	I rms	I sat
Specification	4.7uH	17.5mΩ	6Amps	14Amps
Tolerance	±20%	Max	ΔT ≤ 40°C	L ≥ 65%
1	4.445	13.45	16.1°C	77.4%
2	4.405	13.33		
3	4.437	13.28		
4	4.463	13.35		
5	4.453	13.32		
6	4.378	13.31		
7	4.411	13.38		
8	4.429	13.42		
9	4.359	13.44		
10	4.331	13.37		
\bar{X}	6.060	13.37		
σ	0.033	0.05		

External Dimensions

Item	A	B	C	D	E	F
Specification	8.2	8.2	8.0	0.55	3.4	5.0
Tolerance	± 0.5 (mm)	± 0.5 (mm)	Max	± 0.1 (mm)	± 0.5 (mm)	± 0.4(mm)
1	8.44	8.44	7.85	0.55	3.57	5.10
2	8.42	8.43	7.92	0.54	3.53	5.13
3	8.43	8.42	7.86	0.54	3.47	5.17
4	8.47	8.45	7.94	0.55	3.52	5.08
5	8.46	8.42	7.86	0.54	3.54	5.14
6	8.43	8.44	7.82	0.55	3.44	5.11
7	8.43	8.42	7.83	0.53	3.46	5.10
8	8.45	8.43	7.89	0.55	3.53	5.12
9	8.42	8.45	7.81	0.54	3.48	5.14
10	8.44	8.43	7.93	0.55	3.47	5.12
\bar{X}	8.44	8.43	7.87	0.54	3.50	5.12
σ	0.02	0.01	0.04	0.01	0.04	0.02

Inductance measured at 100KHz/1Vrms.

Electrical specifications at 25°C. Humidity 60±10%

ELECTRICAL CHARACTERISTICS


**RoHS
COMPLIANT**

Customers Part Number	Item Name	Date
	Power Inductor	16-Feb-12
Gan Tong Part NO.	Sample NO.	Page
GPDA0808-4R7M02	S12021602	3-8

Inductance VS DC current

IDC	L	%LOA				
0A	4.433	100.0%				
2A	4.417	99.6%				
4A	4.297	96.9%				
6A	4.142	93.4%				
8A	3.967	89.5%				
10A	3.786	85.4%				
12A	3.615	81.5%				
14A	3.433	77.4%				
16A	3.260	73.5%				
18A	3.095	69.8%				

CONDITION: 100KHZ/1.0Vrms

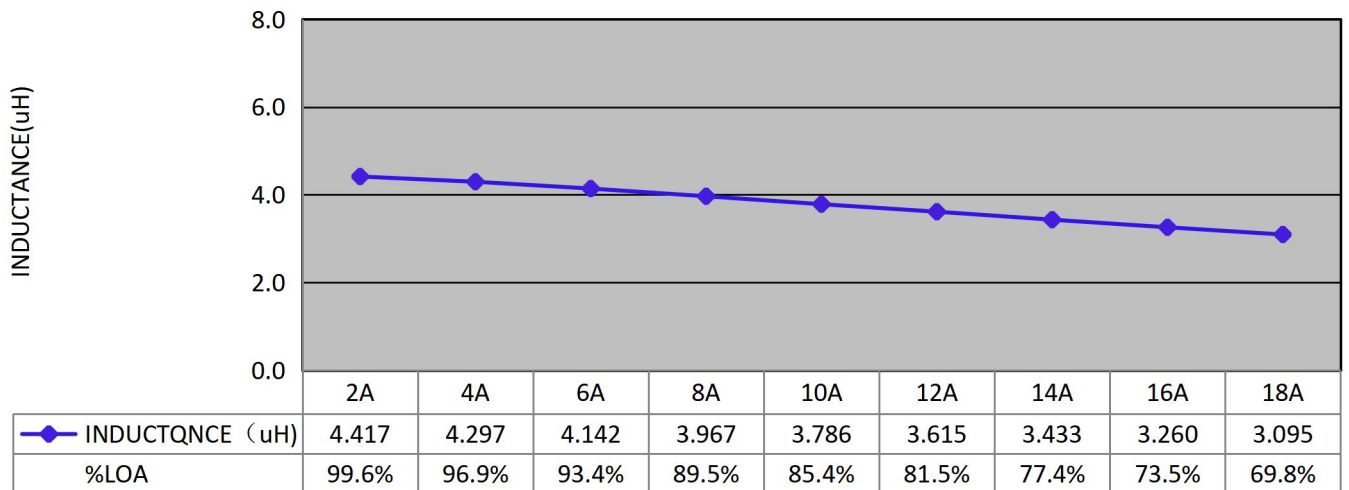

ELECTRICAL CHARACTERISTICS


RoHS
COMPLIANT

Customers Part Number	Item Name	Date
	Power Inductor	16-Feb-12
Gan Tong Part NO.	Sample NO.	Page
GPDA0808-4R7M02	S12021602	4-8

DC current VS Temperature

Time	L (μ H)	T ($^{\circ}$ C)	Δ T($^{\circ}$ C)			
0H	4.117	23.8				
0.5H	4.111	38.8	15.0			
1H	4.110	39.9	16.1			
2H	4.110	39.9	16.1			
3H	4.110	39.9	16.1			
4H	4.110	39.9	16.1			
5H	4.110	39.9	16.1			

CONDITION: Load 6A

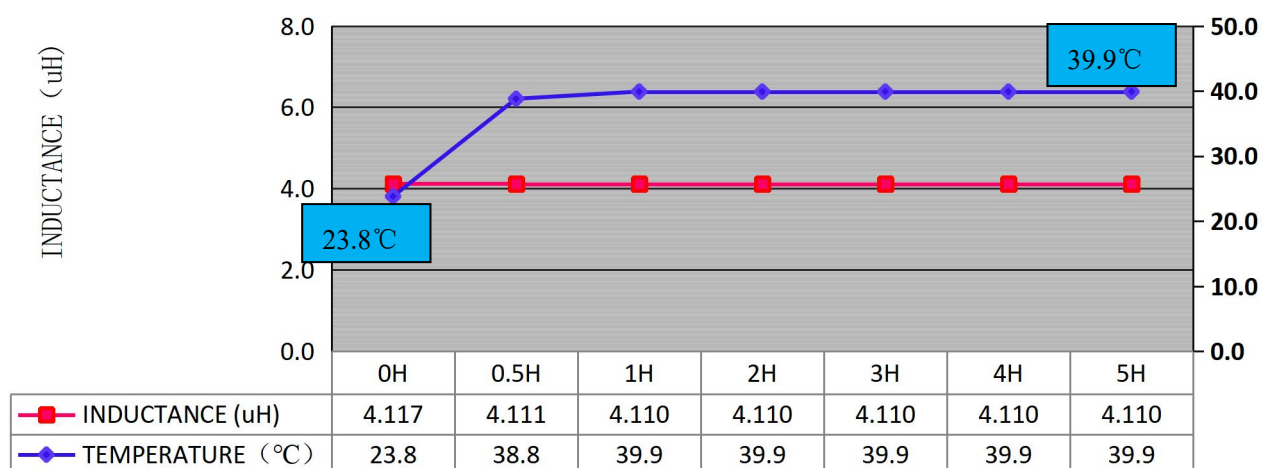

Inductance VS Temperature


ELECTRICAL CHARACTERISTICS

RoHS
COMPLIANT

Customers Part Number	Item Name	Date
	Power Inductor	16-Feb-12
Gan Tong Part NO.	Sample NO.	Page
GPDA0808-4R7M02	S12021602	5-8

Inductance VS Frequency


FREQ.	L (μ H)					
1KHZ	4.465					
10KHZ	4.453					
100KHZ	4.434					
500KHZ	4.384					
800KHZ	4.373					
1000KHZ	4.368					

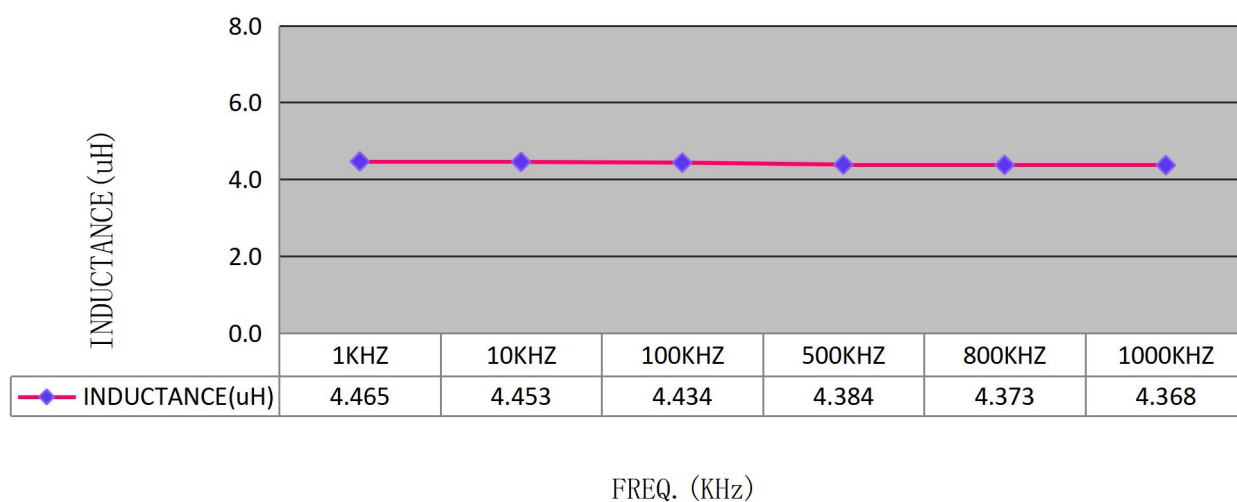



PACKING FOR SPECIFICATION

**RoHS
COMPLIANT**


Customers Part Number	Item Name	Date
	Power Inductor	16-Feb-12
Gan Tong Part NO.	Sample NO.	Page
GPDA0808-4R7M02	S12021602	6-8

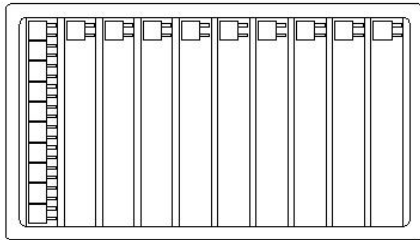

PET Size : 215*148 *16(B)mm
Quantity : 150PCS/PET

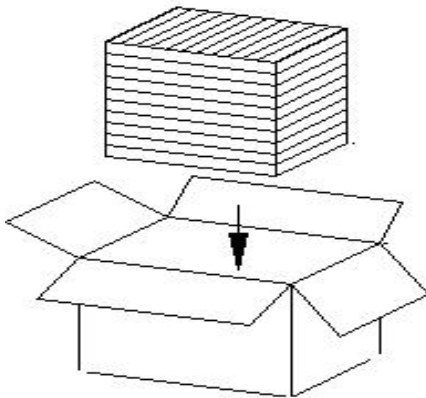

Small box Size : 238*156*165 mm
Quantity : 10PET/Small box
1 Small box/1500PCS



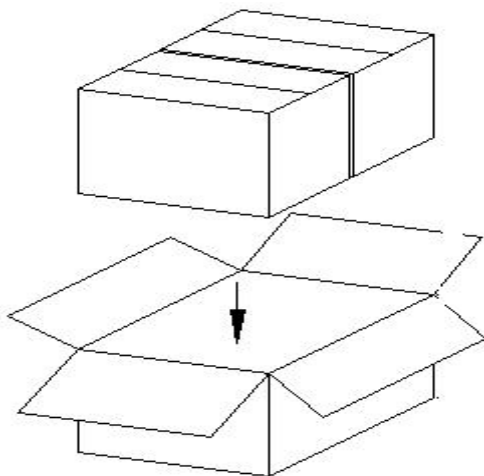


Big box Size : 328*251*175 mm
Quantity : 2 Small box/Big box
1 Big box/3000PCS

GENERAL CHARACTERISTICS

Gan Tong Part NO.: GPDA0808-4R7M02

PAGE : 7-8

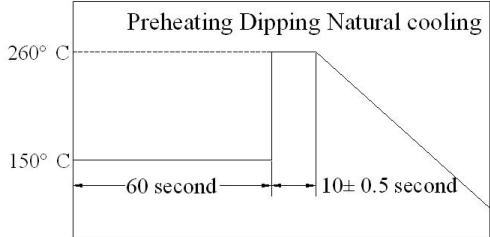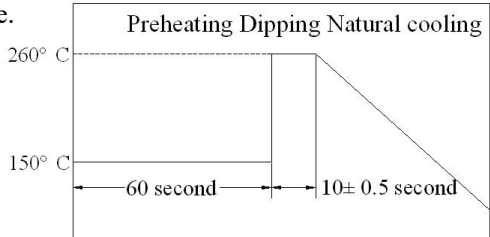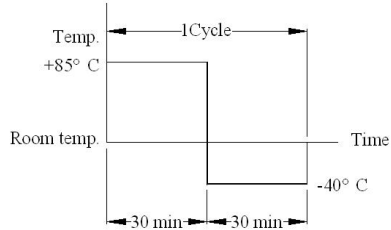Item	Performance	Test Condition
Mechanical Performance Test		
Solder ability Test	More than 90% of terminal electrode should be covered with solder. After fluxing, component shall be dipped in a melted solder bath at $260 \pm 5^\circ\text{C}$ for 10 seconds	
Solder Heat Resistance	Components should have not evidence of electrical and mechanical damage. Inductance: within $\pm 20\%$ of initial value. Preheat: 150°C 60 seconds Solder: (SnCu0.7) Solder Temperature: $260 \pm 5^\circ\text{C}$ Flux: Rosin. Dip time: 10 ± 0.5 seconds	
Low temperature storage test	1. Appearance: No damage. 2. Inductance: within $\pm 20\%$ of initial value. 3. No disconnection or short circuit.	Temperature: $-40^\circ\text{C} \pm 5^\circ\text{C}$ Time: 500 ± 12 Hours Recovery: 4to24hrs of recovery under the standard condition after the removal from test chamber.
High temperature storage test		Temperature: $85^\circ\text{C} \pm 5^\circ\text{C}$ Time: 500 ± 2 Hours Recovery: 4to24hrs of recovery under the standard condition after the removal from test chamber.
Thermal Shock Test (Temperature cycle)		$-40 \pm 5^\circ\text{C}$ for 30 Minutes. $+85 \pm 5^\circ\text{C}$ for 30 Minutes. Total: 10 Cycles 
Humidity load life test		Temperature: $40 \pm 5^\circ\text{C}$ Humidity.: 90-95% Time: 500 ± 12 Hours Load: Allowed DC current Recovery: 4to24hrs of recovery under the standard condition after the removal from test chamber.

THE CONDITION OF REFLOW


RoHS
COMPLIANT

Gan Tong Part NO. : GPDA0808-4R7M02

PAGE :

8-8

Wave Soldering

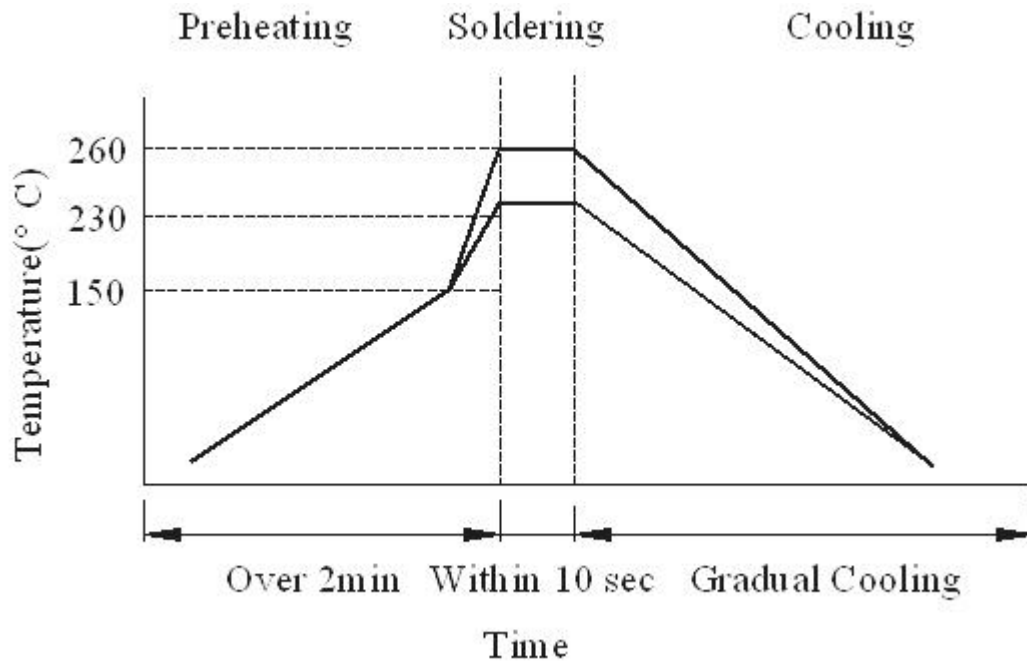

Hand soldering

